

High Gain Ultra-Short Length Phosphate Glass Erbium-Doped Fiber Amplifier Material

Michael R. Lange, Ed Bryant
Harris Corp.
Electronic Systems Sector, Government Communications Systems Division
P.O. Box 91000 (MS: 13-5344)
Melbourne, FL 32902-9100
Ph# 321-727-5119, Fax# 321-727-5132, e-mail: mlange@harris.com

Michael J. Myers, John D. Myers, Ruikun Wu, Christopher R. Hardy, John K. Driver
Kigre, Inc.,
100 Marshland Road, Hilton Head, SC 29926
Ph# 843-681-5800, Fax# 843-681-4559, e-mail: kigre@aol.com

Abstract

New short length optical amplifier designs take advantage of phosphate glass host material features such as high cross section, insignificant concentration quenching, and high solubility for rare earth ions. Recent erbium doped phosphate glass modeling and laboratory data support the prospect of a new class of ultra-short length amplifiers configurations and designs.

Summary

High gain short length erbium doped phosphate glass fibers and waveguides have demonstrated gain figures of 10dB to 27dB in 2.2cm to 8.8cm lengths [1,2,3,4,5,6,7]. Erbium doped phosphate glass amplifier computer modeling and laboratory performance data support the prospect of a new class of ultra-short length amplifiers configurations and designs. With doping levels of 6 to 12% (Wt.%) Er_2O_3 , gains figures of ~ 20dB may be realized in gain lengths of less than 1cm. Figure 1 presents the results of ultra-short, fully saturated, erbium amplifier computer modeling.

ERBIUM DOPING LEVEL VS GAIN FOR DIFFERENT TOTAL LENGTH

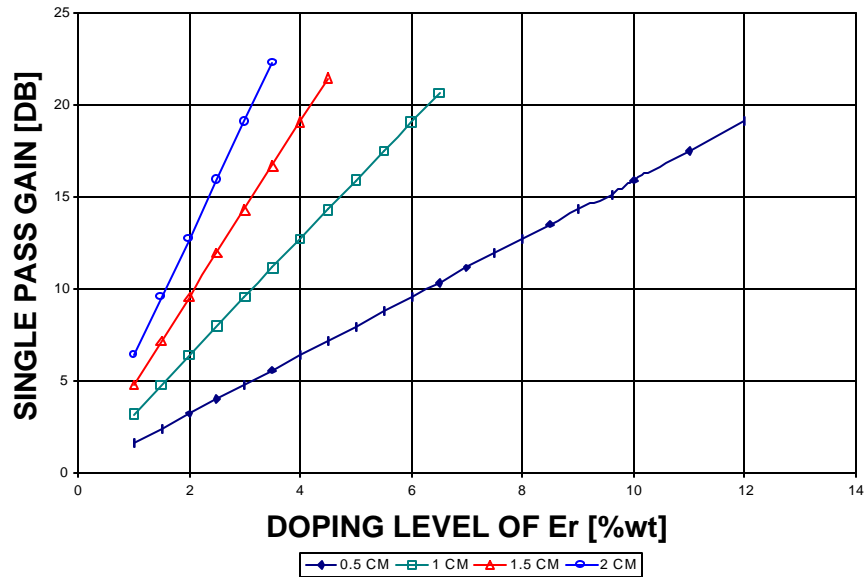


Fig. 1

Table 1 indicates the theoretical relationship between erbium dopant concentration, stored energy, and core diameter for a 1 cm length of QX/Er phosphate glass fiber.

Diameter (microns)	Length (cm)	Doping (% wt)	Er ³⁺ Energy (mj)
8	1	6	0.036
20	1	6	0.22
50	1	6	1.39
100	1	6	5.57

Table 1.

At full saturation or upper-state population gain is estimated to be ~ 20-30dB. Testing and evaluation of ultra-short erbium phosphate glass amplifiers is initially accomplished with micro-disk and micro-chip multiple pass laser oscillators. This test bed is very similar to micro-disk lasers produced in other laboratories [8,9,10]. Advances in silica/phosphate fiber fusion splicing technology have allowed for more conventional test bed measurements of ultra-short fiber amplifier configurations. Additional short length fiber and waveguide amplifier performance data is also presented.

100% Er³⁺ ion 4I_{13/2} inversion, the internal

This work was supported under contract by the US Ballistic Missile Defense Organization and the US Defense Threat Reduction Agency under Contract #DTRA01-01-C-0019. "Opinions, interpretations, conclusions, and recommendations are those of the author and are not necessarily endorsed by the United States BMDO or DTRA."

References

- [1] R. Wu, F. Hakimi, H. Hakimi, J. Myers, M. Myers, "New Generation High Power Rare-Earth-

- Doped Glass Fiber and Fiber Laser", OSA/SPIE, Opto Southeast Conference, 2000.
- [2] M. Lange, E. Bryant, M. Myers, J. Myers, R. Wu, C. Hardy, "High Gain Short Length Phosphate Glass Erbium-Doped Fiber Amplifier Material", OSA, Optical Fiber Communications Conference Proceedings, (OFC) March, 17-22, 2001.
 - [3] S. Jiang, B-C. Hwang, T. Luo, K. Seneschal, F. Smektala, S. Honkanen, J. Lucas, and N. Peyghambarian, "Net gain of 15.5 dB from a 5.1 cm-long Er³⁺-doped phosphate glass fiber", OSA, Optical Fiber Communications Conference Proceedings, 2000, PD5-1.
 - [4] D. Barbier, P. Bruno, C. Cassagnettes, M. Trouillon, R. L. Hyde, A. Kevorian, J.M.P. Deavaux, "Net gain of 27 dB with a 8.6 cm long Er/Yb-doped glass planar amplifier", OSA, Optical Fiber Communications Conference, (OFC) 1998.
 - [5] P. Iannone, K. Reichmann, M. Birk, N. Frigo, R. Derosier, D. Barbier, C. Cassagnettes, T. Garret, A. Verlucco, J. Philipsen, "A 160-km Transparent Metro WDM Ring Network Featuring Cascaded Erbium-Doped Waveguide Amplifiers", Submitted to OSA, (OFC) Proceedings, March, 17-22, 2001.
 - [6] D. Barbier, R. Hyde, "Erbium-Doped Glass Waveguide Devices", Chapter 5, pp89-126, Integrated Optical Circuits and Components- Design and Application, Optical Engineering Series, Edited by Edmond J. Murphy, Published by Marcel Dekker, Inc., 1999.
 - [7] D. Barbier, M. Rattay, F. Saint Andre, A. Kevorkian, J. Delavaux, E. Murphy, "Amplifying Four Wavelengths Combiner Based On Erbium-Ytterbium Doped Planar Integrated Optical Modules", 22nd European Conference on Optical Communication, ECOC'96, Oslo, 1996.
 - [8] P. Laporta, S. DeSilverstri, V. Magni, O. Svelto, "Diode-Pumped CW Bulk Er:Yb:Glass Laser", Optics Letters, Vol. 16, No. 24, Dec. 1991.
 - [9] P. Laporta, S. Lonhi, S. Taccheo, O. Svelto, "Single-Mode CW Erbium-Ytterbium Glass Laser at 1.54 μ m", Optics Letters, Vol. 18, No. 1, Jan. 1993.
 - [10] P. Thony, E. Molva, "1.55 μ m-Wavelength CW Microchip Lasers", OSA Proc. on Advanced Solid State Lasers, (ASSL) 1996.